



UWT
LEVEL CONTROL



Our Products

“With heart and soul – and smooth co-operation“



When we started, over 40 years ago, with the development of our ingenious products, no one could have foreseen the unparalleled success story that followed. UWT has become one of the leading suppliers of measurement technology on the world market today for the level detection in silos and material manufacturing processes. With over a million successfully solved applications, the names of e.g. Rotonivo®, Vibranivo® and Nivobob® represent quality, flexibility and reliability in over 60 countries across the world.

The development, production and sales departments are located at our headquarters in Germany, with a further production site in Malta. UWT has also established successful sales offices in the USA, UK, China, India and most recently Russia. With this global orientation, we are able to serve and support our customers with complete competence and flexibility. From development through production to final assembly and comprehensive technical advice, we can offer a complete service from a single source. Focus is placed on delivering the highest quality products, technical expertise and a good working relationship with customers, suppliers and partners. The strongly held belief by CEO Uwe Niekrawietz is for the welfare of over 130 employees world-wide: „Healthy and happy employees can make the unbelievable happen“.

Every year, our product portfolio evolves, develops and brings about solutions for a variety of industries. As well as providing level measurement we also offer monitoring and visualisation systems, together with complete project planning. Renowned plant manufacturers and end users around the world appreciate our ability to deliver customised solutions for their applications, as well as the ease of use and durability of the UWT sensors. Our strategy in the consistent monitoring of our own steady and sustainable growth allows us to provide the best value solutions for our customers.



Headquarters in Betzigau, Germany




Awarded for innovative
industrial solutions



Our mission

We are guided by our company characteristics: responsibility, enterprising as well as challenging and stimulating. Our company values: **quality**, **reliability**, **flexibility** form our strategic direction and guide us when dealing with colleagues, customers or business partners alike.

	UWT Mission						
	<table> <tr> <td>Quality:</td><td>Product performance 99,8 %</td></tr> <tr> <td>Reliability:</td><td>Competent employees and long-lasting products</td></tr> <tr> <td>Flexibility:</td><td>Customer orientation and satisfaction</td></tr> </table>	Quality:	Product performance 99,8 %	Reliability:	Competent employees and long-lasting products	Flexibility:	Customer orientation and satisfaction
Quality:	Product performance 99,8 %						
Reliability:	Competent employees and long-lasting products						
Flexibility:	Customer orientation and satisfaction						

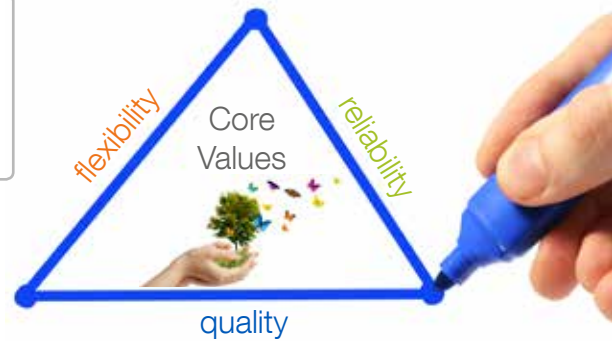


Your team for innovative measurement technology

As a German small and medium-sized enterprise (SME) and family run business, for the past years we have become the world's competent partner for level measurement technology. A company reaches such a position only if the following key elements interact: Sound management, good understanding of the needs of the markets, innovative product solutions, skilful investment and above all, committed and dedicated employees.



ADM
 Anheuser-Busch
 AZO
 Baosteel Group
 BASF
 BAYER
 Baxter
 Beck's
 BMW
 Bridgestone
 Camfil APC
 Cargill
 Colabeton
 Colgate-Palmolive
 Coperion
 Evonik
 Dr. Oetker
 Dynamic Air
 Lafarge
 Heidelberger Zement
 Heinz
 Italcementi
 Liebherr
 Manes
 Protec
 maxit-Group
 MOTAN
 m-tec
 MVV Umwelt O&M
 Nestlé
 Owens Corning
 Pirelli
 Reimelt
 Schenck Process
 Siemens
 Starbucks
 Unilever
 Veka
 VW
 Zeppelin

Our core industries



Building & Cement



Chemicals



Food



Animal Feed



Environment & Recycling



Power



Synthetics



Wood



Rubber



Metal



Glass



Others

Approvals world-wide



Quality Certificates



Our products

Rotonivo®

Rotary Paddle Level Switch

A motor driven shaft causes a vane to rotate. Once the material level reaches the vane, thereby preventing further rotation, switches are activated which result in an output signal and the motor stops. When the vane is free again from material, the output signal is reset and the motor driven shaft rotates again.



RN 3000



RN 4000



RN 6000



RN 3002
Pipe



RN 3002
Rope



Our Solutions for:

- Strong caking
- Dusty environments
- Abrasive materials
- Extreme process temperature
- Over pressure and low pressure environments
- Heavy mechanical loading
- Electrostatic charging
- Explosive environments
- Various changing factors
- EHEDG applications

Special Features:

- ✓ Universal voltage electronics
- ✓ Rotation principle unaffected by caking
- ✓ Robust aluminium die cast housing
- ✓ Adjustable sensitivity (>15g/l)
- ✓ Protected motor (friction clutch & double bearing)
- ✓ Long lifespan (brushless synchronised motor)
- ✓ Temperature range from -40°C to +1,100°C
- ✓ High quality grade stainless steel (process)
- ✓ RN 6000 is world's first rotating level limit switch compliant to **SIL 2**

Vibranivo®

Vibrating Level Switch

Electronically stimulated piezos cause the fork to vibrate. As soon as the sensor is covered with material, the vibration is dampened and the resulting electrical current change causes the output signal to switch. Once the material level falls below the sensor it is free to vibrate again and the output signal is reset.

VN 1000



VN 2000




VN 4000



VN 5000



VN 6000

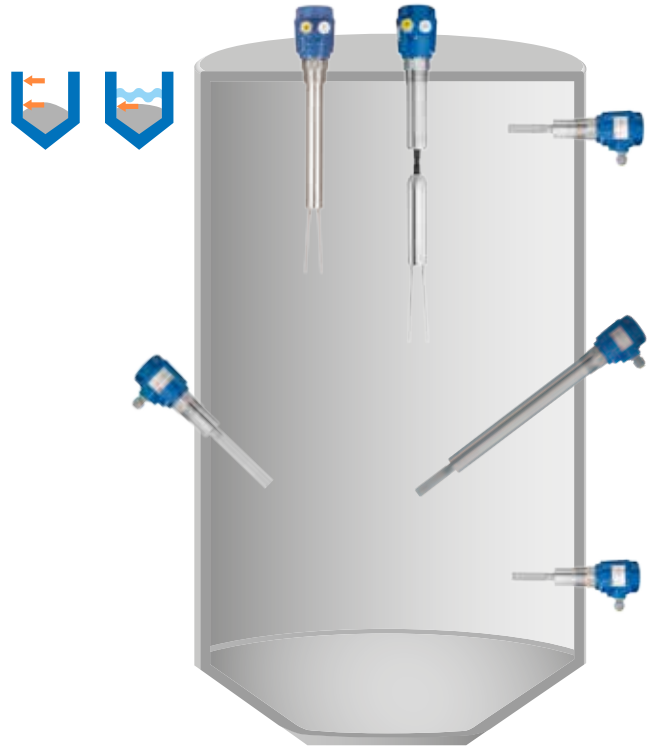

Our Solutions for:

- Extremely light product density
- Pneumatic filling
- Process overpressure
- Limited space
- Vibration within the vessel
- High reliability requirements
- High hygienic requirements
- Explosive environments
- Sediment levels in liquids
- EHEDG applications

Special Features:

- ✓ PFA and Teflon coating
- ✓ High sensitivity (<5g/l - Vibrasil®)
- ✓ Surface roughness of 0.75µm
- ✓ Temperature range from -40°C to +150°C
- ✓ NAMUR Standard
- ✓ Suitable for overpressure up to 16bar
- ✓ Extremely robust short version
- ✓ High quality material in the process (SS 316L)
- ✓ Level control of sediments in liquids

Mononivo®

Vibrating Level Switch

Electronically stimulated piezos cause the single rod probe to vibrate. When the material covers the sensor, this causes the vibration to stop and a voltage change is caused within the piezo elements. This is electronically registered and causes the output signal to switch.


MN 4020



MN 4030



MN 4040

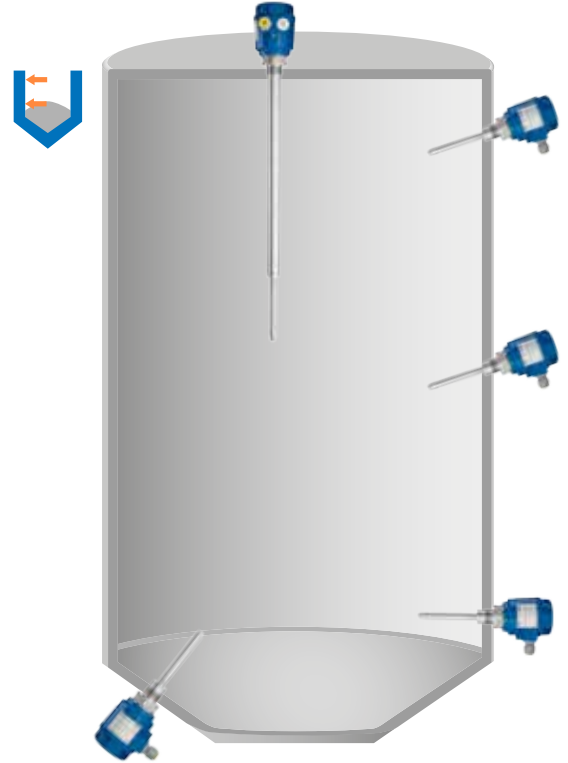

Our Solutions for:

- Light products from 20g/l
- Powdery material with strong caking properties
- Coarse-grained granulate
- Pneumatic filling
- Process overpressure
- Limited space
- Overfill detection within pipes and shafts
- Vibration within the vessel
- High safety standard
- High hygienic requirements
- Explosive environments

Special Features:

- ✓ Compact limit switch with threads from 1"
- ✓ Sensitivity adjustable in 4 settings
- ✓ High surface quality
- ✓ Temperature range from -40°C to +150°C
- ✓ Suitable for overpressure up to 16bar
- ✓ Robust version
- ✓ Heavy mechanical loading
- ✓ High quality material in the process (SS 316L)

RFnivo®

Capacitive Level Switch

The capacitive level limit switch is automatically calibrated to a reference capacitance of an empty vessel. If the probe is covered by the product, the measured capacitance changes through the dielectric and a switching signal is activated. The integrated "Active Shield" technology ensures high reliability even for products that cause caking.

RF 3100



RF 3200



RF 3300



Remote Version



Our Solutions for:

- Dusty environments
- Abrasive media
- Extreme process temperatures
- Positive and negative pressure
- Heavy materials
- Caking bulk solids
- Quick calibration
- Hazardous areas
- EHEDG applications

Special Features:

- ✓ Bulk materials with very low DK value >1.5
- ✓ Applications with process pressure up to 25bar
- ✓ Vibration in the vessel
- ✓ High hygiene requirements
- ✓ Simple to install and set up
- ✓ User-friendly through automatic calibration
- ✓ PFA anti-corrosive coating
- ✓ Temperature range from -40°C up to +500°C
- ✓ High quality process materials (SS 316L, ceramics, PPS)
- ✓ High safety standard

Capanivo®

Capacitive Level Switch

The electrodes in the sensor form a capacitor. If the product comes into contact with the sensor, the capacitance changes and the electronics converts it into a switching signal. The integrated "Active Shield" technology allows this system to be used in particularly adhesive materials.

CN 4020




CN 4020 Temp.



CN 4030



CN 4050

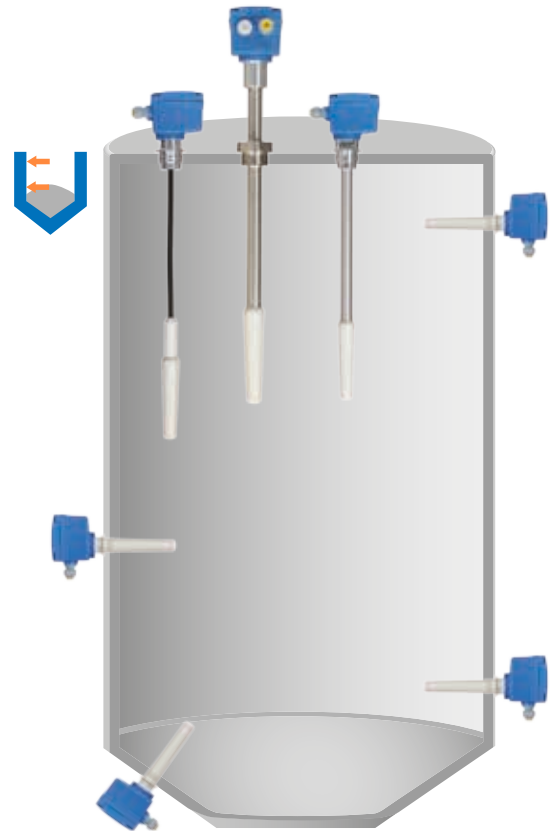

Our Solutions for:

- Dusty environments
- Caking
- Light materials
- Pneumatic filling
- Overpressure
- Corrosion resistance for aggressive material
- High chemical resistance
- High standard of safety requirement
- Explosive environments

Special Features:

- ✓ Function principle independent of silo wall
- ✓ Temperature range from -40°C to +180°C
- ✓ Variety of supply voltages
- ✓ Adjustable switching delay
- ✓ High sensitivity ($DK \geq 1.6$)
- ✓ Overpressure up to 25bar
- ✓ Variety of mechanical versions
- ✓ Approvals for dust explosive environments

Nivobob®

Electro-mechanical Plumb Bob

A sensor weight attached to either a metal tape or rope is electromechanically lowered into the vessel. Once the sensor weight rests on the material, the winding direction of the motor changes and the sensor weight is rewound to the upper stop position. As the weight is lowered, the distance is electronically measured.


Microprocessors convert the measured distance together with the programmed silo geometry into a volumetric output signal. This signal is updated each time the sensor weight is lowered.



NB 3000



NB 4000 Aiming flange

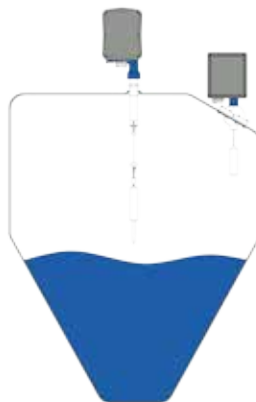

Sensor weights



Our Solutions for:

- Strong caking
- Material with changing temperature and humidity
- Electrostatic charging
- Heavy material as well as light solids
- Limited space
- Low dielectric constant
- Large measurement distances
- Aggressive environments (noisy, dirty)
- Explosive environments


Special Features:

- ✓ Overpressure version up to 1.7bar
- ✓ Temperature range from -40°C to +250°C
- ✓ High sensitivity (>20 g/l) dep. on sensor weight
- ✓ Integrated tape cleaner
- ✓ Diagnostics function
- ✓ Measurement range of up to 50m
- ✓ Simple installation and set up
- ✓ Rope and tape version
- ✓ Service life up to 500,000 cycles of tape version
- ✓ Comm. via Modbus RTU or Profibus DP

NivoRadar®

Radar Sensor

A high frequency signal is transmitted with a very small beam angle with a two-wire technology. It is reflected by the bulk material and received back to the sensor. The frequency difference, which is directly proportional to the distance, is then further processed and output as the level signal. The small beam angle makes the use in tall tight silos possible and facilitates the installation and alignment of the sensor.

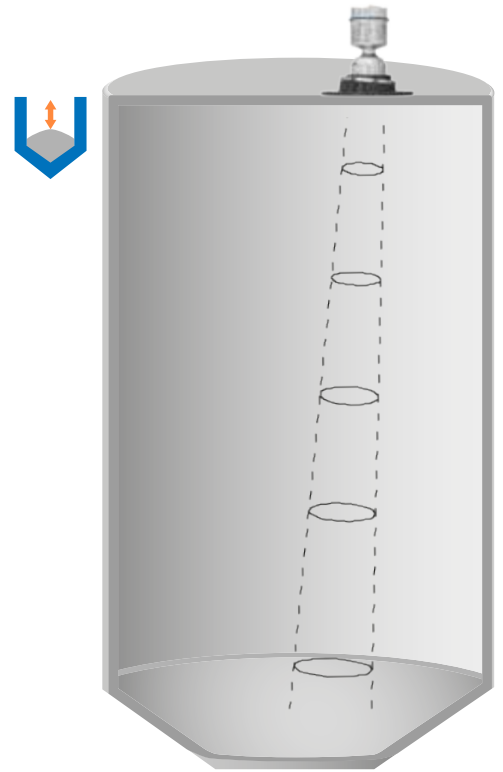

NR 3000 Flange versions

Flat flange



Aiming flange



Functions

Electronics with
78GHz frequency

Integrated
lens cleaner

Aiming flange
up to max. 10°



Signal processing with
Process-Intelligence-
Software

Lens antenna with
4° beam angle

Programming module



Plug-on Display:

Programming
Input starting parameters
Display level and diagnostic data

Our Solutions for:

- Various application industries
- Dusty environment
- Very light material
- Measurement range of up to 100m
- Use within tight, high silos
- Optimum reflection of the bulk solids material
- Corrosion resistance for aggressive material
- High process temperature
- Perfect positioning
- Explosive environments

Special Features:

- ✓ Signal processing with Process-Intelligence-Software
- ✓ Temperature solution up to +200°C
- ✓ 78 GHz technology
- ✓ 4° beam angle
- ✓ High sensitivity ($DK \geq 1.6$)
- ✓ Lens antenna and mounting flange are flush
- ✓ Integrated lens cleaner
- ✓ Robust stainless steel housing IP68
- ✓ Aiming flange model
- ✓ Plug-on Display
- ✓ Quick Start Wizard
- ✓ Simple, six-step commissioning

Nivotec®

Level monitoring and visualisation


NT 2000 Level indication integrated within a control cabinet

- Indication of level in weight, height, percentage or volume via LED display
- For evaluating the output signal from any level sensors with analog signal 4-20 mA
- Fill control by silo full detectors
- Truck module for tanker trucks to prevent overfilling of silos
- Clear and easy management of the different indicators
- Complete system with project specific electrical plans



NT 3500 Level visualisation from a PC via webserver


- Level visualisation via webserver
- Password-protected for various use levels with standard browser software on the Ethernet
- For data storage and downloads, trend data and evaluation
- World-wide remote access to the visualisation software
- Fill control by alarm full detection, pinch valve control within filling tubes and recognition of tanker coupling
- For integration of truck operating modules at filling station stage
- Level- and alarm-message via e-mail
- Interfaces for level sensors, 4-20mA, Modbus RTU, Ethernet TCP, counter signal, relay
- Complete system with project specific electrical plans
- Individual project planning

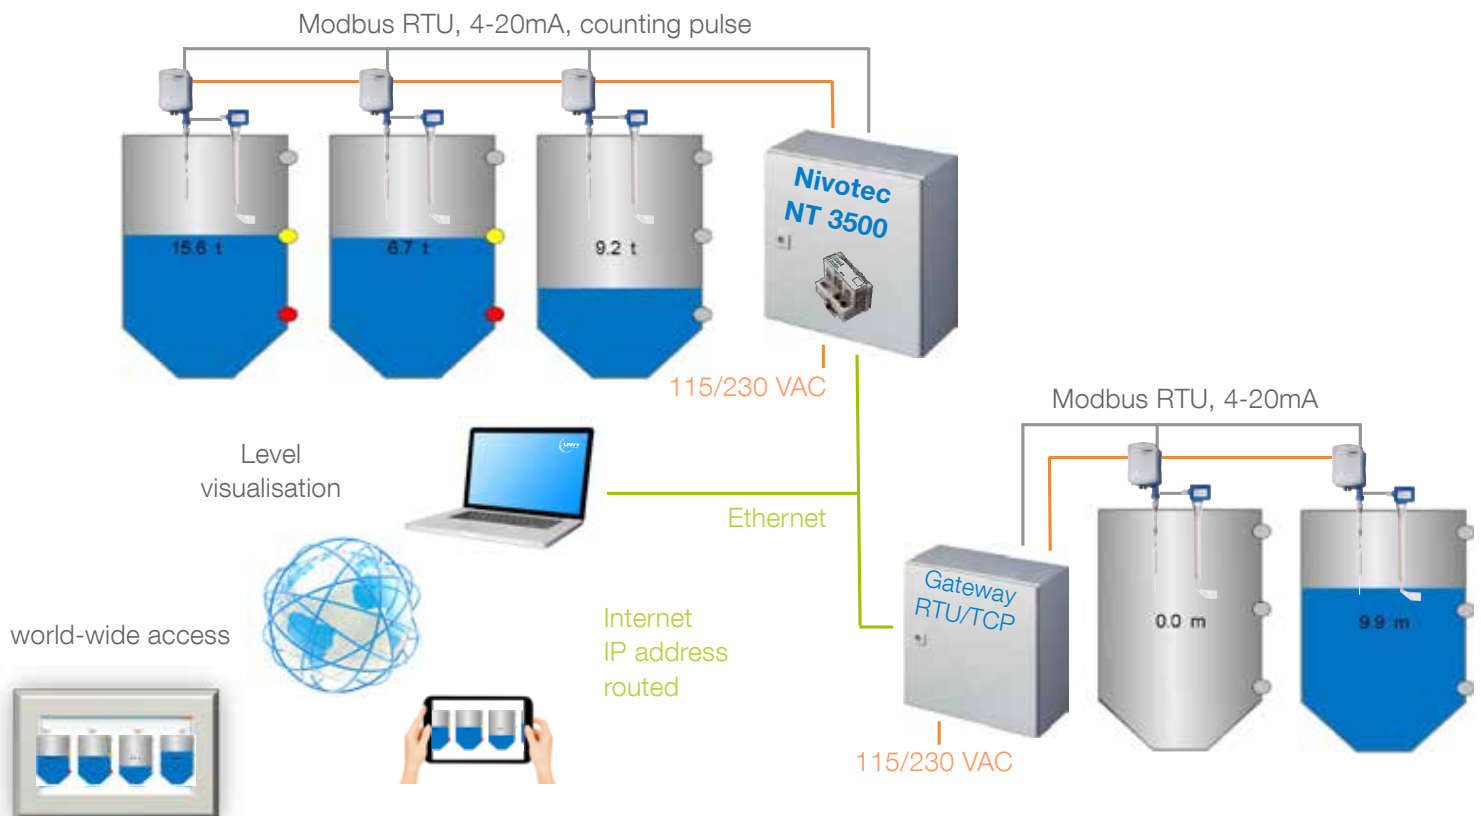

Example of a complete visualisation system for NT 3500

NT 4500 Level visualisation from a PC via webserver


- Standardised, cost effective level visualisation via webserver
- Password-protected for various use levels with standard browser software on the Ethernet
- For data storage and downloads, trend data and evaluation
- Fill control by alarm full detection
- Level- and alarm-message via e-mail
- Interfaces for level sensors, 4-20mA, Modbus RTU
- Complete system with electrical plans

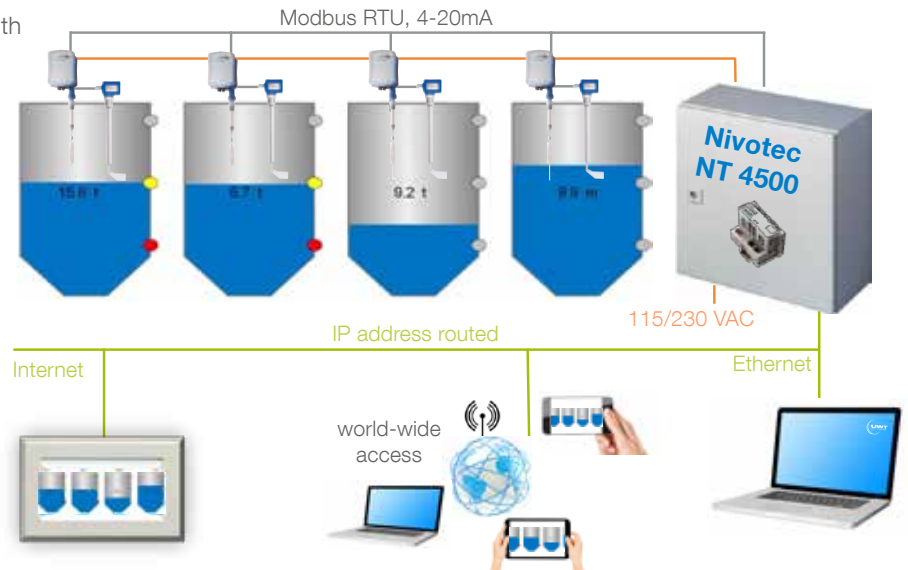

Example of a complete visualisation system for NT 4500

NT 4600 Level visualisation via 7" touch panel

- Visualisation and operation via 7" touch panel
- Data in percentage, height, volume or weight
- Trend display, data storage
- Evaluation of the analogue 4-20mA signals of any sensors, as well as Modbus RTU of the UWT-systems
- Fully wired whether mounted or within control cabinet

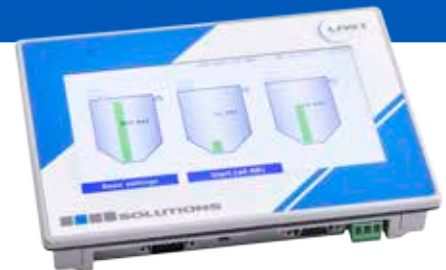

NT 4700 Level indicator with digital display

- Digital display hardwired into the terminal box
- Evaluation of level signal 4-20mA of any sensors
- Level indication via 4-digit LED display in weight, height, percentage or volume
- Version for suitable for Nivobob® with "Start measurement" button and LED for "sensing weight in the upper end position"



NT 4900 Level indicator with digital display

- Built-in digital display module
- Level indication in weight, height, percentage or volume
- Yellow LED-Display, 4-digit, 7 segment
- Easy to use button operation on face of unit
- Interface 4-20mA



Service & Support

High-class service for high-tech products

The competent UWT sales and service team helps our clients in consulting and engineering, with professional installation, precise parameterization and a universal service support. Our products are designed individually according to the needs of our customers. Particular service package features can be selected as well as a fixed price, universal service support arrangement.

However, with any service support provided by UWT, our specialists are not satisfied before our customers are.



Project

- Our experts offer individual advice for tailored measurement technology for your system
- We will support you throughout the whole project and are always there for you, to support you with technical questions
- At UWT you get complete packages from a single source – simply, professionally and efficiently



Installation and Set-up

- Our experienced specialists will install all matched components professionally and give you a smooth start
- For the wiring, it goes without saying we only use high-quality materials, e.g. outdoor cables are UV protected
- At the commissioning stage, UWT service technicians leave nothing to chance and thus prevent any incorrect set up from the start



Operator training

- Operator instructions and user training ensure effective implementation and a trouble-free operating
- After commissioning we will continue to support your plant

Special Solutions

Interface measurement

Principles of function with Nivobob®

The electromechanical lot sensors Nivobob® 3300/3400 detect the level of sludges and solids in liquids, e.g. stones, sand, salt, slag, etc. - precisely, even within aggressive liquids. Applications range from sludge level measurement within lime and gravel plants to interface measurement in salt water.



NB 3300



NB 3400



Conductive material

Principles of function with Kondunivo®

The conductivity of a material allows electricity to flow between the Kondunivo® process connection and the probe when the sensor is covered with material, resulting in an output signal. As soon as the material level falls, the electrical circuit is broken and the output signal is reset. Alternating current is used to prevent corrosion of the sensor probe and an electrochemical reaction of the material. To ensure reliable measurement in a variable liquid surface, an adjustable output signal delay is standard. The Kondunivo® can be used in metal, as well as non metal vessels.



KN 2700



KN 2800



Batch measurement

Principles of function with Flexinivo®

A vibrating fork sensor (Vibranivo®) attached to a tape can be lowered accurately to within millimeters to the required measurement point in the vessel. This allows both flexible point level measurement, as well as batch measurement. The Flexinivo® is programmed via an external SPS controller.



FN 6



Global Partner for ingeniously simple and reliable level measurement



UWT GmbH
Westendstr. 5
87488 Betzigau
Germany

Tel.: +49 (0) 831 57 123 0
Fax: +49 (0) 831 57 123 10

www.uwt.de
info@uwt.de

Contact Details

 **made
in
Germany**

UWT (UK) Ltd
20 Main Road
Dorrington
Shropshire SY5 7JW
Great Britain

Tel: +44 (0) 1743 718 883
Fax: +44 (0) 1743 718 883

www.uwtuk.com
sales@uwtuk.com

UWT Level Controls LLC
4445 Malone Road
38118 Memphis TN
USA

Tel: +1-901-531-6090
Fax: +1-901-531-6095

www.uwtlevel.com
info@uwtlevel.com

UWT Level Control India Pvt. Ltd.
Plot No 52, Udyog Vihar Phase-VI
Sector 37
122001 Gurgaon
Haryana
India

Tel: +91-124 412 1600
Fax: +91-124 412 1611

www.uwt-india.com
info@uwt-india.com

UWT International Trading
(Shanghai) Co., Ltd
1st Floor, Plant No. 7, Lane 333
Zhujian Road, Huacao Town
Minhang District,
Shanghai 201107, P.R. China

Tel: +86 21 6468 4193
Fax: +86 21 6469 6707

www.uwt.cn
info@uwt.eu

UWT RUS Level Measurement, LLC
Dorozhnaya st., 8 b.1
Office 110
117545 Moscow
Russian Federation

Tel: +7 499 723-75-73

www.uwtlevel.ru
info@uwtlevel.ru