

Specifications ThunderION 2.0	
Available effective length	250mm to 4375mm
Calculation Eff.L.	(n x 125)
Overall length	= Eff.L. + 195
(n = variable, number of distance between high voltage points)	



1: DIN RAIL Power Supply
100-240 V AC/24 V DC 10A
P/N: 7519020435



2: DIN RAIL Power Supply
100-240 V AC/24 V DC 4A
P/N: 7519020425


Cable Socket M12, female straight
5 m P/N: 7519020365
10 m P/N: 7519020366
10 m P/N: 7519020380 - cable chain, shielded

Cable Socket M12, female angled
5 m P/N: 7519020375
10 m P/N: 7519020376

Connector M12, female straight
(screw connections)
P/N: 7519020350 (ø4-6 mm cables)
P/N: 7519020351 (ø6-8 mm cables)

Connector M12, female angled
(screw connections)
P/N: 7519020355 (ø4-6 mm cables)
P/N: 7519020356 (ø6-8 mm cables)


Ac Power Supply Cord 2 m
P/N: 9146340620

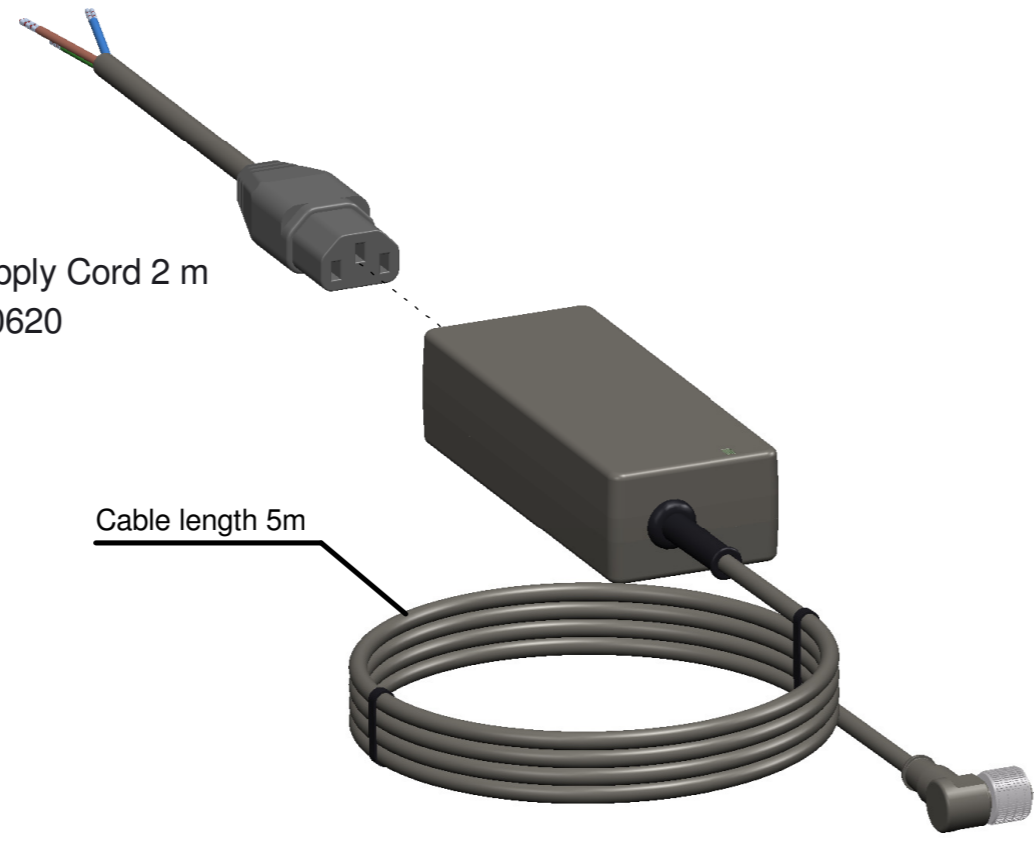

Power Supply 100-240 V AC/24 V DC
P/N: 4509001000
(AC Power Supply cord 2m included)

DIN RAIL Power Supply	
no.	maximum number of bars
1	5
2	2


* Emitter

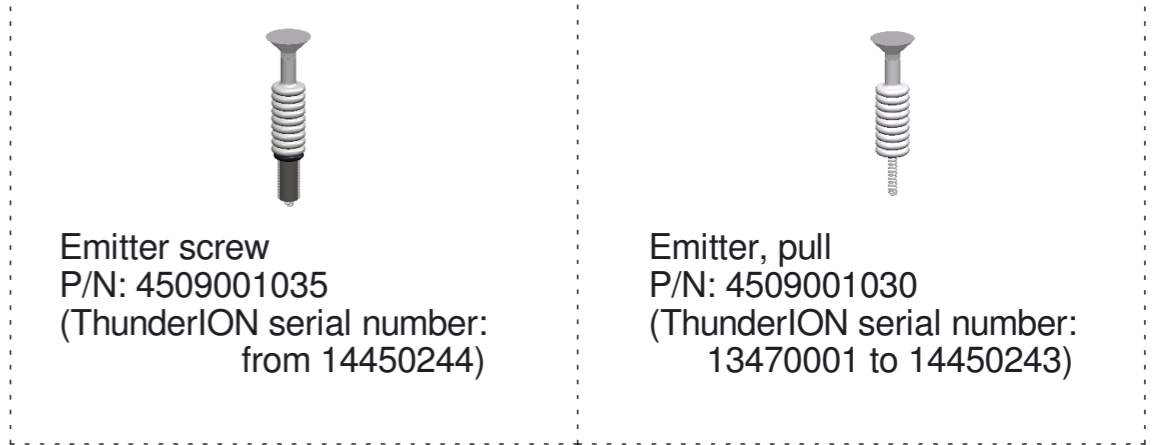

Emitter screw
P/N: 4509001035
(ThunderION serial number:
from 14450244)

Emitter, pull
P/N: 4509001030
(ThunderION serial number:
13470001 to 14450243)

Bar ThunderION 2.0

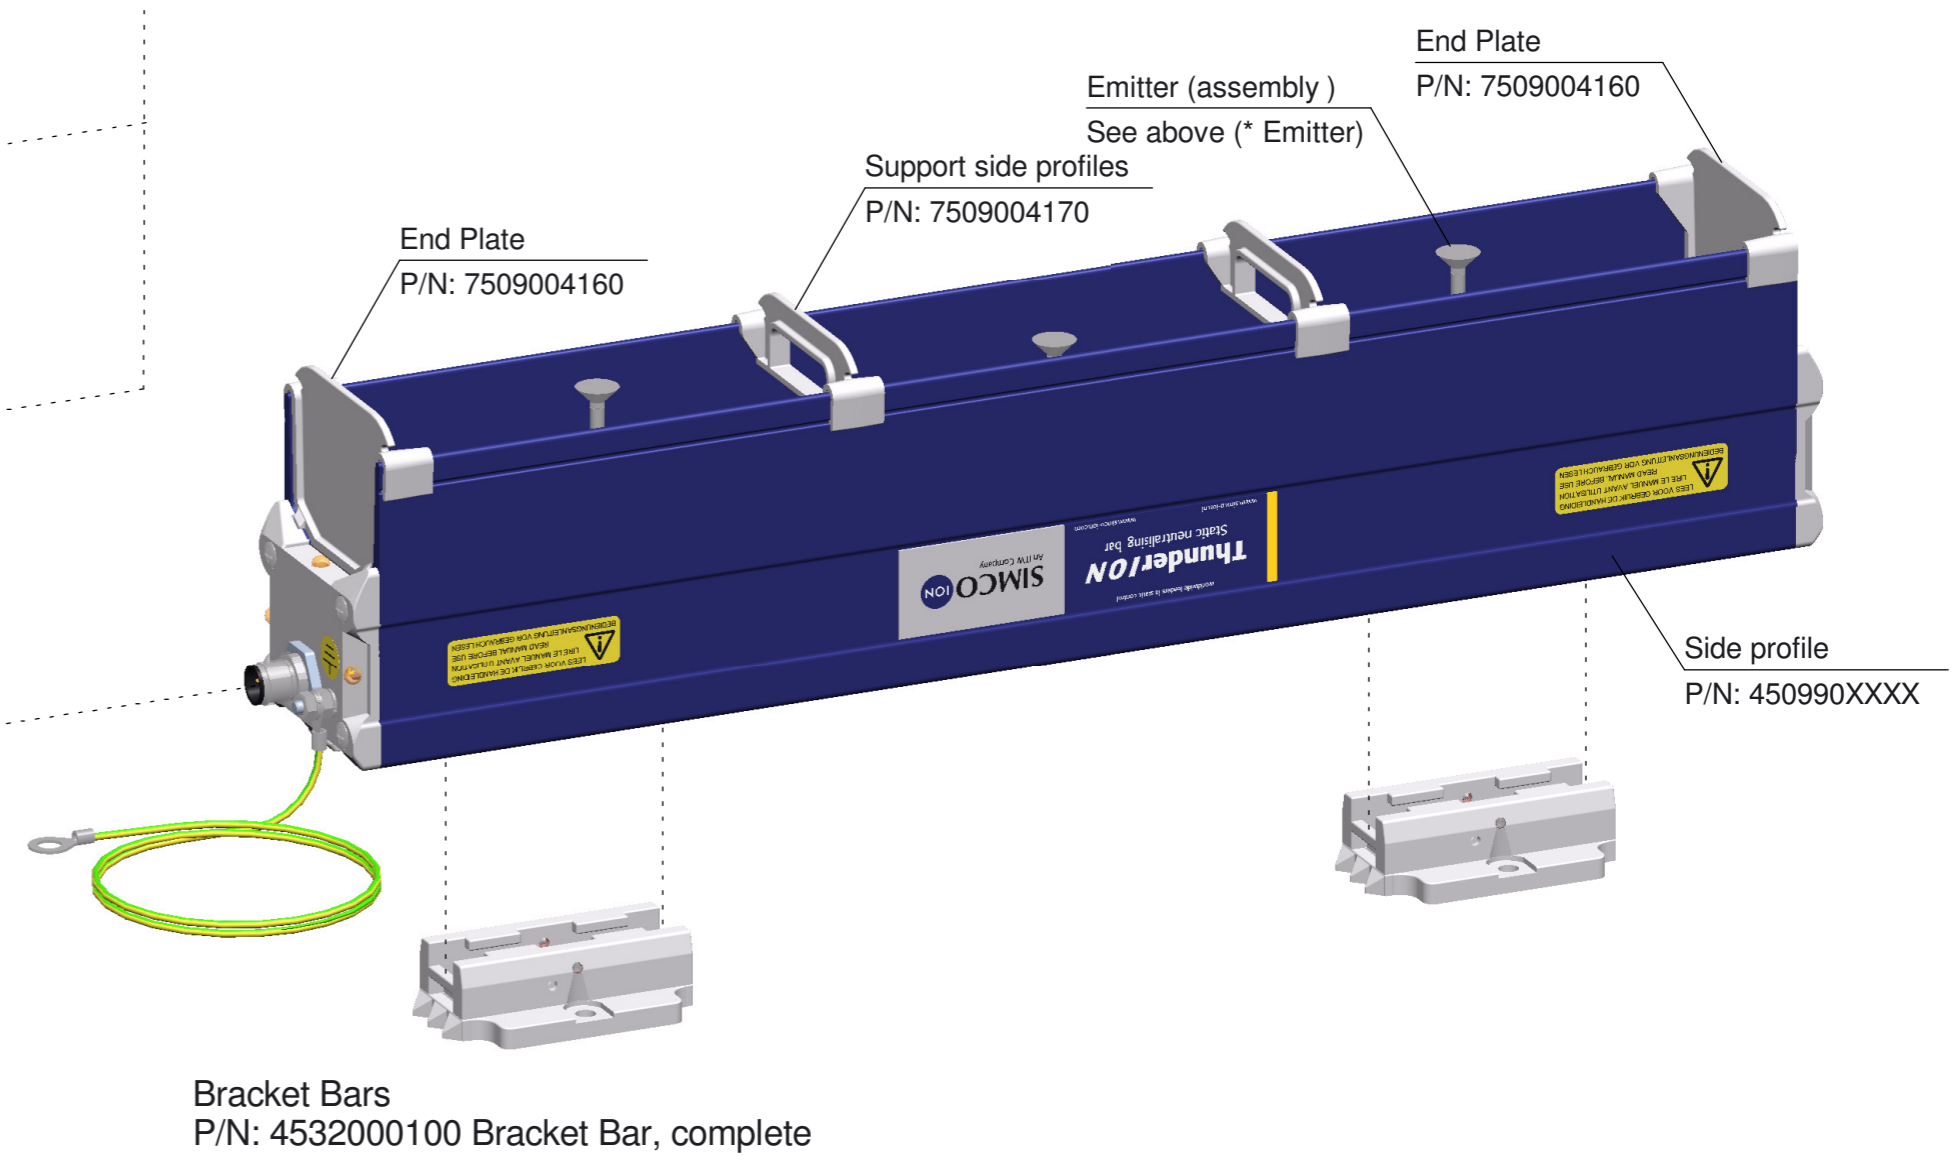

End Plate
P/N: 7509004160

Support side profiles
P/N: 7509004170


Emitter (assembly)
See above (* Emitter)

End Plate
P/N: 7509004160

Side profile
P/N: 450990XXXX

Bracket Bars
P/N: 4532000100 Bracket Bar, complete

Protection cover

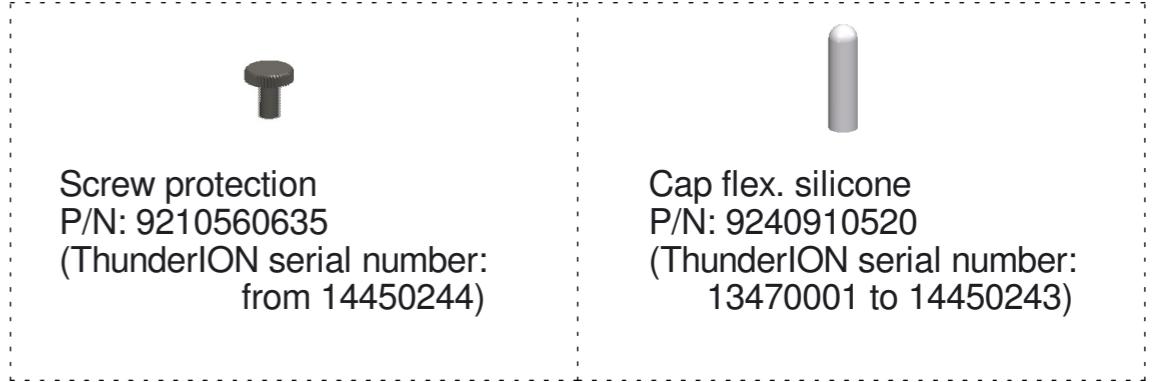

Screw protection
P/N: 9210560635
(ThunderION serial number:
from 14450244)

Cap flex. silicone
P/N: 9240910520
(ThunderION serial number:
13470001 to 14450243)