


NR 7000 Accessories

Variable seal


Variable seal Article number	d1 mm (Inch)	d2 mm (Inch)	b mm (Inch)	b max mm (Inch)	b min mm (Inch)	Fitting Mounting flange rectangular	Fitting to counter flanges
zu400771	89 (3.5)	142 (5.59)	22 (0.87)	30 (1.18)	14 (0.55)	zu400765	DN80 PN10-40 EN 1092-1
zu400772	115,0 (4.53)	162,0 (6.34)	24 (0.94)	33 (1.30)	14 (0.55)	zu400766	DN100 PN16 EN 1092-1
zu400773	169,0 (6.65)	218,0 (8.58)	27 (1.06)	39 (1.54)	14 (0.55)	zu400767	DN150 PN16 EN 1092-1
zu400774	115,0 (4.53)	171,0 (6.73)	24 (0.94)	33 (1.30)	14 (0.55)	zu400766	4" ASME B16.5 150 lb
zu400775	168,0 (6.61)	219,0 (8.62)	27 (1.06)	39 (1.54)	14 (0.55)	zu400767	6" ASME B16.5 150 lb

Variable seal

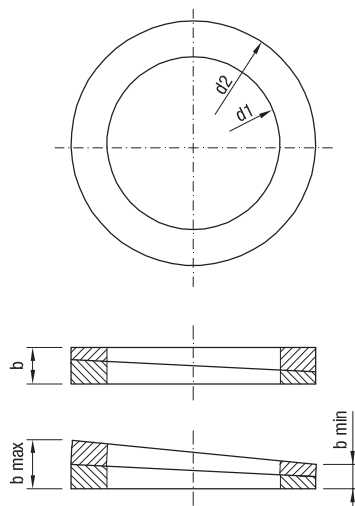

The variable seal consists of an upper and lower disk which can be rotated against each other. This allows to continuously adjust an angle from 0° to 8°.

Mounting

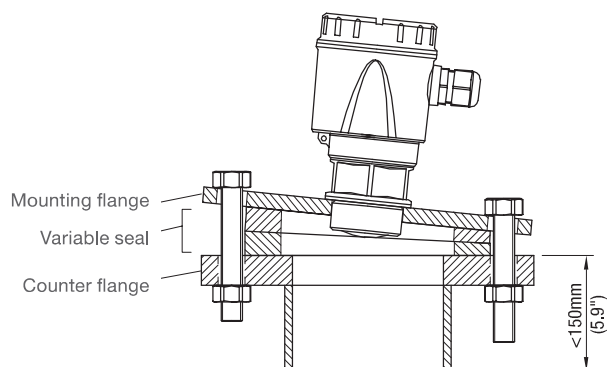

The variable seal is being clamped between Mounting flange and counter flange.

Fixing torque of the screws 5-10Nm.


Observe:

- Max. length of socket
- Grease or oil may damage the seal
- Avoid multiple use, this may reduce the tightness


NR 7000 Accessories

Standard flange

Article-number	Type	Number of holes	d2 mm (Inch)	Lk mm (Inch)	D mm (Inch)	T (thickness) mm (Inch)
zu400776/ -777	DN50 PN6	4	14,0 (0.55)	110,0 (4.33)	140,0 (5.51)	14,0 (0.55)
zu400778/ -779	DN50 PN16	4	18,0 (0.71)	125,0 (4.92)	165,0 (6.5)	18,0 (0.71)
zu400780/ -781	DN80 PN6	4	18,0 (0.71)	150,0 (5.91)	190,0 (7.48)	16,0 (0.63)
zu400782/ -783	DN80 PN16	8	18,0 (0.71)	160,0 (6.3)	200,0 (7.87)	20,0 (0.79)
zu400784/ -785	DN100 PN6	4	18,0 (0.71)	170,0 (6.69)	210,0 (8.27)	16,0 (0.63)
zu400786/ -787	DN100 PN16	8	18,0 (0.71)	180,0 (7.09)	220,0 (8.66)	20,0 (0.79)
zu400788/ -789	DN150 PN6	8	18,0 (0.71)	225 (8.85)	265 (10.43)	18,0 (0.71)
zu400790/ -791	DN150 PN16	8	22,0 (0.87)	240,0 (9.45)	285,0 (11.2)	22,0 (0.87)
zu400792/ -793	ASME 2" 150 lbs	4	19,1 (0.75)	120,7 (4.75)	152,4 (6.01)	19,1 (0.75)
zu400794/ -795	ASME 3" 150 lbs	4	19,1 (0.75)	152,4 (6.01)	190,5 (7.5)	23,9 (0.94)
zu400796/ -797	ASME 4" 150 lbs	8	19,1 (0.75)	190,5 (7.5)	228,6 (9.0)	23,9 (0.94)
zu400798/ -799	ASME 6" 150 lbs	8	22,2 (0.87)	241,3 (9.5)	279,4 (11.0)	25,4 (1.0)



ASME flanges raised face:




DN flanges: EN 1092-1 type A, flat faced
ASME flanges: B16.5 raised face

Hygienic connections (adapter)

Triclamp

Article number: zu400705

DN50 (2")

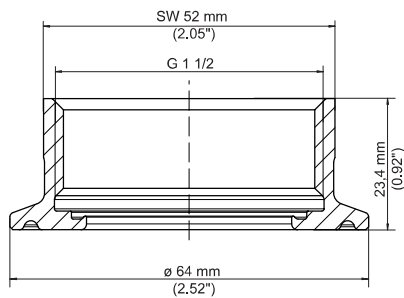


O-ring sealing EPDM
-40 .. +80 °C (-40 .. +176 °F)
Ra < 0,76um

Slotted nut

Article number: zu400708

DN50

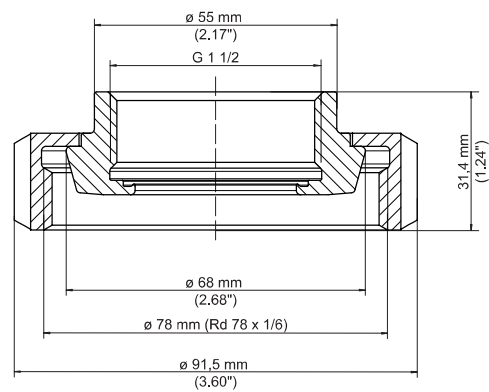

O-ring sealing EPDM
-40 .. +80 °C (-40 .. +176 °F)